### **ACT**pro eLocks

Order Code	RFID Type	Suitability
ACTpro eLock	125 KHz	No key override or privacy latch facility
ACTpro eLock K	125 KHz	Key override facility only
ACTpro eLock P	125 KHz	privacy latch facility only
ACTpro eLock K2	125 KHz	Key override and privacy latch facility
ACTpro eLock MF	MIFARE	No key override or privacy latch facility
ACTpro eLock MFK	MIFARE	Key override facility only
ACTpro eLock MFP	MIFARE	Privacy latch facility only
ACTpro eLock MFK2	MIFARE	Key override and privacy latch facility

Please Note: Cylinders or privacy latches are not included. The escutcheon plates are blank in the case of "no key override" or have euro profile slots to facilitate the cylinder and or privacy latch.

**Fire Rating Standard** 

**Door Furniture Test Standard** 

BS EN 1634-1:2014 - 30 and 60 minute fire doors

BS EN 1906:2013 Grade 3 (37-B010)

# **ACT**pro eLock Hub Controller and Accessories

Order Code	Product Description
ACTpro eLock hub	Wireless hub controller for up to 32 eLocks
ACTpro eLock TST	Battery operated test unit for range testing
ACTpro eLock MC	Memory card for expanded feature set
ACTpro eLock DM	Door monitor contact
ACTpro eLock BAT	CR123A lithium battery for eLock (one required per lock)

## **ACT**enterprise **Software**

Order Code	Product Description	
ACTEnt	ACTpro Enterprise Software (multiple administrator PC's)	
ACTEnt Lite	ACTpro Enterprise Software (single administrator PC)	

### **Dimensions & Technical Information**

Specifications	eLock	Hub
Ethernet Connection	N/A	TCP/IP 100Mbit/s DHCP or static IP address
Operating Voltage	1 X 3Volt lithium battery (CR123A)	12VDC or POE (802.3 af)
Weight	1.3Kg	450gms
Operating Temperature	Zero to +50 degrees Celsius	Zero to +50 degrees Celsius
Dimensions (HxWxD mm)	293x46x30 inside 293x46x25 outside	165x236x55
Lock casing	Euro profile (8mm spindle)	Not Supplied

# ACTpro eLock

Real time wireless networked electronic locks that can be installed within minutes on most internal wooden door types. Up to 32 locks can communicate over a wireless network with each ACTpro eLock hub.

The hub is compatible with the ACTpro 4000 and 1500 series door controllers. System configuration and administration is facilitated via ACT Enterprise PC software.

### 2 Year Warranty on eLock systems

### **Lock Features**

- Up to 200,000 lock activations (CR123A Lithium battery)
- Hi-secure 128bit AES encrypted wireless communication (868MHz)
- Up to 100m range (locks to hub receiver)
- Auto discovery of locks for ease of set up
- Memory card for extra door rights
- Fire Alarm override and toggle modes
- White listed cards (Master Key access always)
- Battery voltage monitoring (at lock and PC)
- USB interface provides external power in the event of battery failure
- Door/tamper monitoring (magnetic contact required)
- Suitable for internal wooden doors (36 60mm wide)
- Requires Euro profile lock casing (8 mm spindle)
- Brushed stainless steel finish
- Free egress at all times via inside handle






Unit C1 South City Business Centre, Tallaght, D.24, Ireland. Tel +353 (0)1 466 2570 2C Beehive Mill, Jersey Street, Manchester, M4 6JG, UK.

www.act.eu www.act.eu

# ACT pro eLock

### **Hub Features**

- 32 eLocks per hub (up to 100m range)
- 60,000 users
- Connects to Enterprise software over TCP/IP connection
- Signal strength monitoring
- Auto discovery of locks
- Timed actions
- POE or 12V DC supply
- Compatible with ACTpro controllers

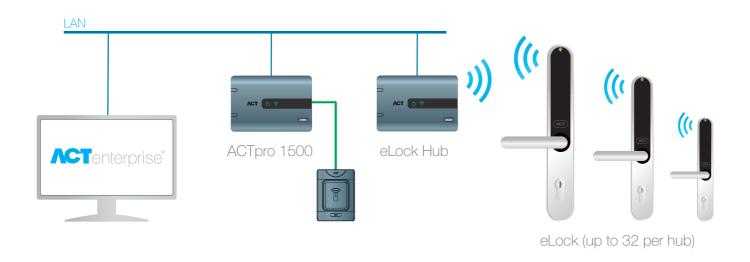



# **OUTSIDE**







No Key Override No Privacy Latch

**Order Codes** 

125Khz ACTpro eLock **MIFARE** ACTpro eLock MF



**Order Codes** 

125Khz ACTpro eLock K **MIFARE** ACTpro eLock MFK



No Key Override **Privacy Latch** 

**Order Codes** 

125Khz ACTpro eLock P **MIFARE** ACTpro eLock MFP



**Key Override Privacy Latch** 

**Order Codes** 

125Khz ACTpro eLock K2 **MIFARE** ACTpro eLock MFK2



